



# FY series safety switches with separate actuator with lock

## Description




These switches are used on machines where the hazardous conditions remain for a while, even after the machines have been switched off, for example because of mechanical inertia of pulleys, saw disks, parts under pressure or with high temperatures. Thus, the switches can also be used if individual guards are only to be opened under certain conditions.

The versions with solenoid actuated NC contacts are considered interlocks with locking in accordance with ISO 14119, and the product's label is marked with the symbol shown.




## Holding force of the locked actuator




The strong interlocking system guarantees a maximum actuator holding force of  $F_{1max} = 2800 \text{ N}$ .

## Wide-ranging actuator travel



The actuation head of this switch features a wide range of travel. In this way the guard can oscillate along the direction of insertion (4.5 mm) without causing unwanted machine shutdowns. This wide range of travel is available in all actuators in order to ensure maximum device reliability.


## Heads and devices with variable orientation



The system can be variably configured by loosening the 4 screws on the head.

The key release device and the release button can also be rotated and secured independently of one another in steps of  $90^\circ$ . The device can thus assume 32 different configurations.

## Integrated control devices

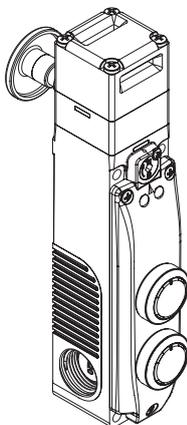


The switch is also available with integrated control devices, allowing up to two devices and related contact blocks, such as buttons, emergency stop buttons, indicator lights or selectors to be mounted.

The result is a compact solution with direct access to control devices without needing to install them separately on the switch panel or in their own housing.


The devices can be illuminated and, thanks to the PUSH-IN spring-operated connections, wiring is quick and intuitive.

## Non-detachable heads and release devices



The head and the release device can be rotated but cannot be detached from each other. This makes the switch more secure since the problem of incorrect assembly by the installer cannot occur; in addition, the risk of damage is lower (loss of small parts, penetration of dirt, etc.).

## Key release device and escape release button

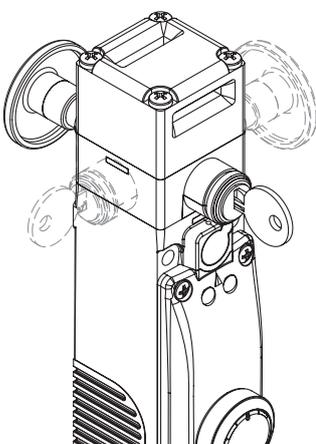

The key release device (auxiliary release) is used to permit unlocking of the actuator only by personnel in possession of the key. The device also functions with no power supply and, once actuated, prevents the guard from being locked.

The escape release button allows actuator release and immediate opening of the guard. Generally used in machines within which an operator could inadvertently become trapped, it faces towards the machine interior, to allow the operator to exit even in the event of a power failure. The button has two stable states and can be freely extended in length with suitable

extensions (see accessories).

Both devices can be positioned on the four sides of the switch. As a result, it can be installed both towards the interior and towards the exterior of the machine.


## Contact blocks with 4 contacts



Innovative contact block with 4 contacts, available in various contact configurations for monitoring the actuator or the solenoid (patented). The unit is supplied with captive screws and self-lifting clamping plates. Removable finger protection for eyelet terminal.

High-reliability electrical contacts with 4 contact points and double interruption.

## Safety screws for actuators



As required by EN ISO 14119, the actuator must be fixed immovably to the guard frame. Pan head safety screws with one-way fitting are available for this purpose. With this screw type, the actuators cannot be removed or tampered by using common tools. See accessories on page 359 of the General Catalogue Safety 2021-2022.



### LED display unit, type A




In the version with LED display unit of type A, two green LEDs are switched-on directly by the power supply of the solenoid. Wiring is not necessary.

### LED display unit, types B and C



In the version with LED display unit of type B, connection wires from two LEDs are available, one green and one red. By means of suitable connections on the contact block, various operating states of the switch can be displayed externally.



### Protection degree IP67

# IP67

These devices are designed to be used under the toughest environmental conditions, and they pass the IP67 immersion test acc. to EN 60529. They can therefore be used in all environments where the maximum degree of protection is required for the housing.


### Extended temperature range

# -40°C

These devices are also available in a special version suitable for an ambient operating temperature range from -40°C up to +60°C.

They can therefore be used for applications in cold stores, sterilisers, and other equipment operated in very low-temperature environments. The special materials used to produce these versions retain their characteristics even under these conditions, thereby expanding the installation possibilities.

### Three conduit entries



The switch is provided with three conduit entries in different directions. This allows its application in series connections or in narrow places.

### Sealable auxiliary release device



Switches with locked actuator with deactivated solenoid (function principle D) are equipped with an auxiliary release device for the solenoid to simplify installation of the switch and to facilitate entry into the danger zone in the event of a power failure. The auxiliary release device acts on the switch exactly as if the solenoid was energised. As a result, it also actuates the electrical contacts. Can only be actuated with the use of two tools; this ensures adequate protection against tampering. If necessary, it can be sealed using the appropriate hole.

### Laser engraving




All FY series switches are permanently marked with a special laser system. As a result, the marking remains legible even under extreme operating conditions. Thanks to this system that does not use labels, the loss of plate data is prevented and a greater resistance of the marking is achieved over time.

### Access monitoring



These safety switches alone do not provide sufficient personal protection to the operators or maintenance personnel in situations where they completely enter the danger zone, since unintentional closing of a door after entry could cause the machine to re-start. If the re-start release is completely dependent on these switches, a system for preventing this danger must be provided, e.g. a padlockable device for actuator entry locking VF KB2 (see page 132 of the General Catalogue Safety 2021-2022) or a safety handle, such as a P-KUBE Fast (see page 189 of the General Catalogue Safety 2021-2022).

### Holding force of the unlocked actuator



The inside of each switch features a device which holds the actuator in its closed position. Ideal for all those applications where several guards are unlocked simultaneously, but only one is actually opened. The device keeps all the unlocked guards in their position with a retaining force of approx. 30 N, stopping any vibrations or gusts of wind from opening them.

### LED signalling lights




Thanks to the three threaded cable entries, the high luminosity LED signalling lights of the VF SL series can be installed on the switch.

The LED signalling lights can be easily installed by screwing them on one of the conduit entries not used for electric cables. They can be used for many different purposes: for example, to signal, from a distance, whether the switch has been actuated; whether the guard has closed correctly; or whether the guard is locked or unlocked.

For more information see chapter Accessories, on page 359 of the General Catalogue Safety 2021-2022.

## Selection diagram

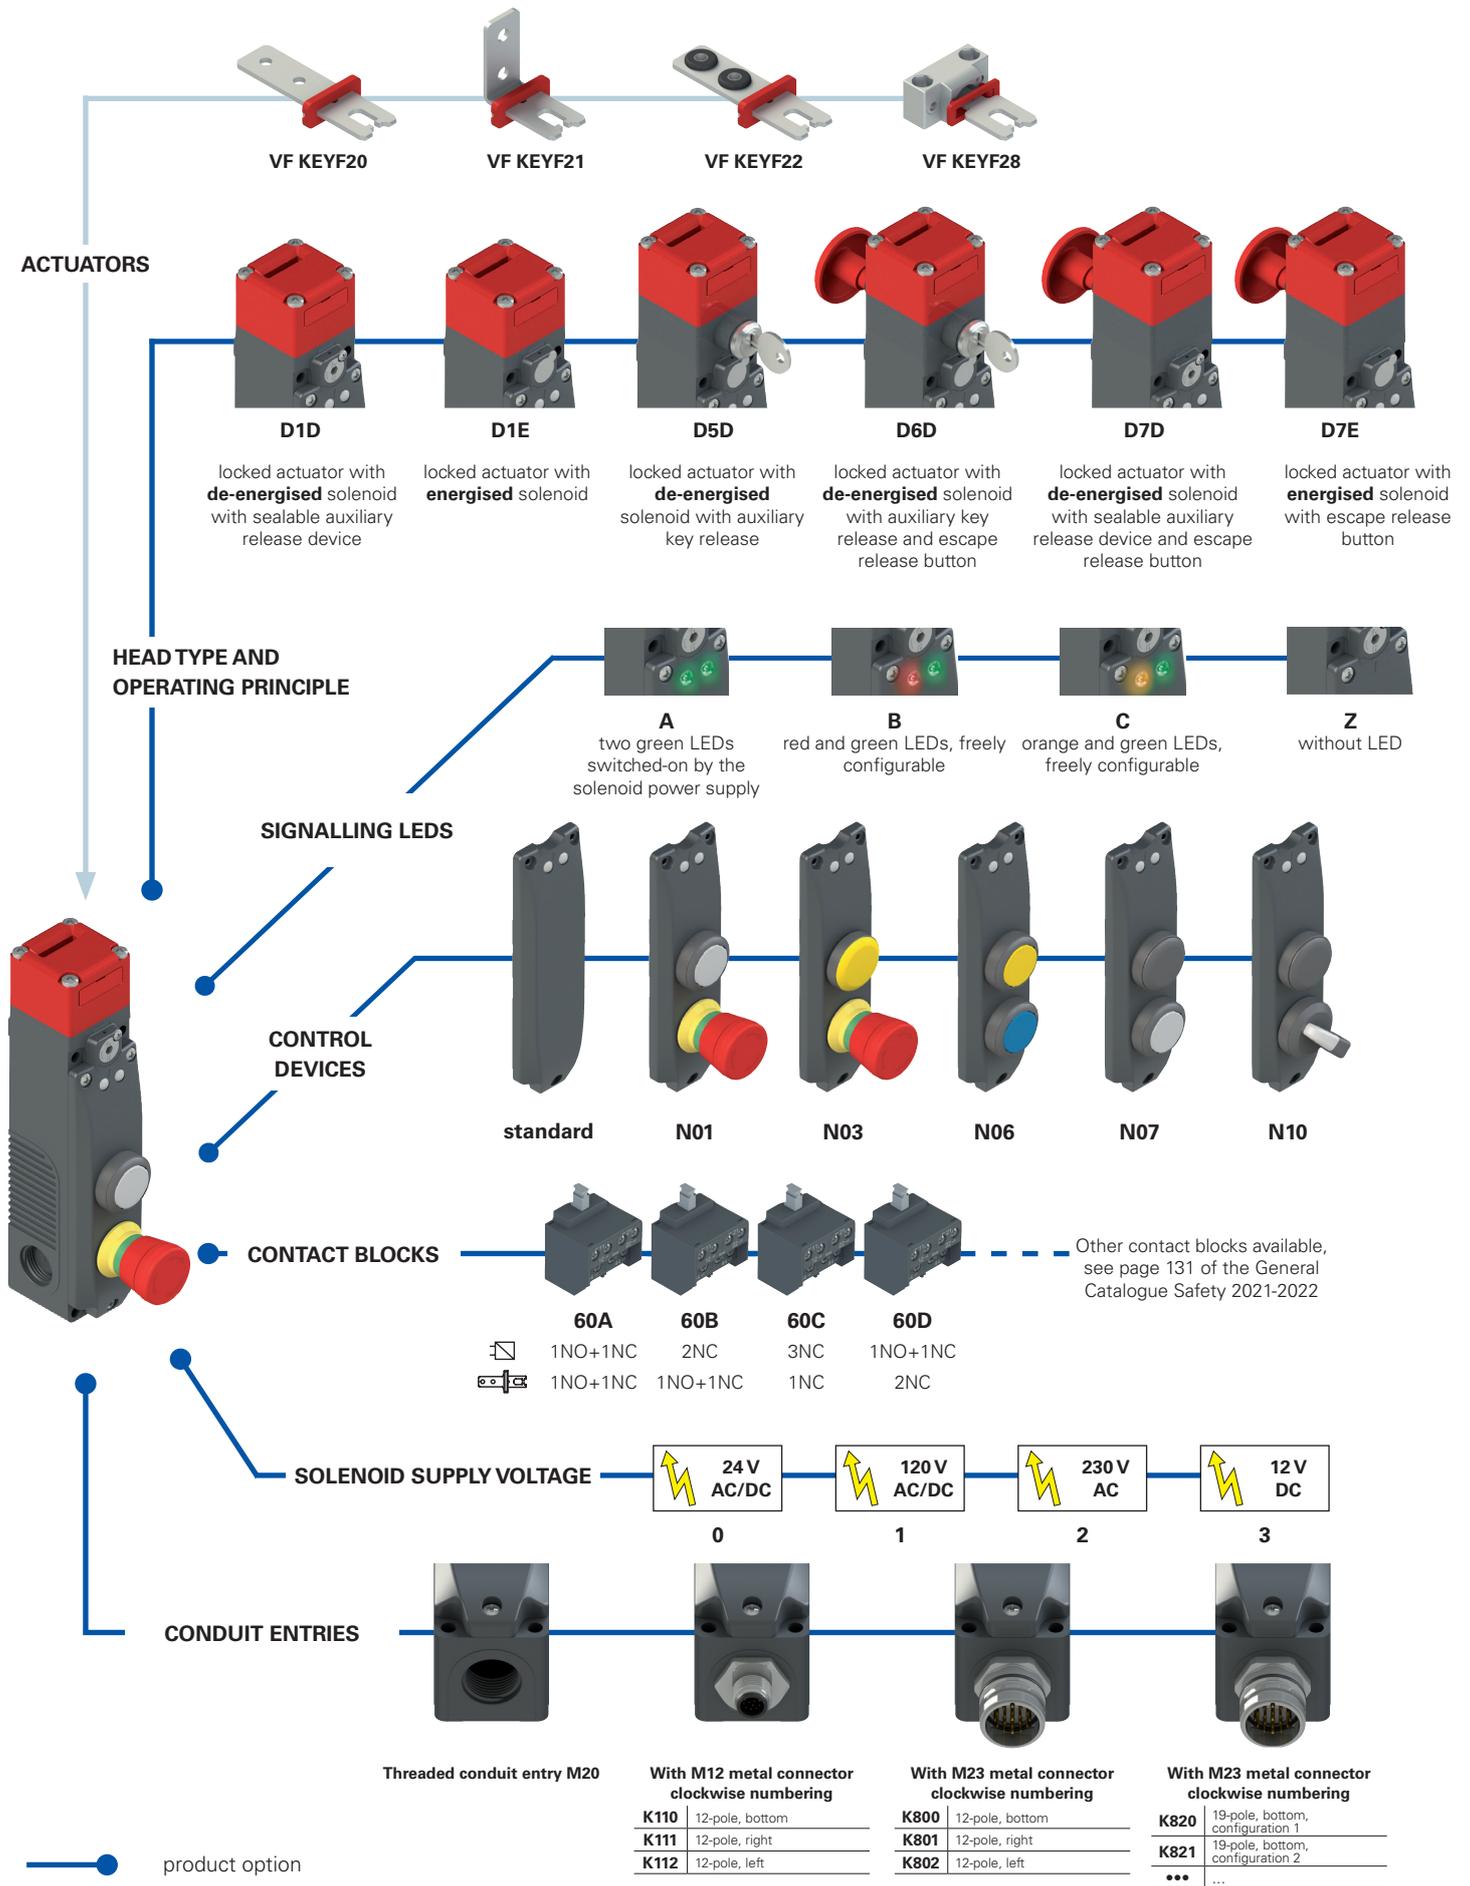



## Code structure

**Attention!** The feasibility of a code number does not mean the effective availability of a product. Please contact our sales office.

article **FY 60AD1D0A** options **-LP30N01F20GK110T6V34**

Contact blocks		
	Contacts activated by the solenoid	Contacts activated by the actuator
<b>60A</b>	1NO+1NC	1NO+1NC
<b>60B</b>	2NC	1NO+1NC
<b>60C</b>	3NC	1NC
<b>60D</b>	1NO+1NC	2NC
<b>60E</b>	1NO+2NC	1NC
<b>60F</b>	1NO+2NC	1NO
<b>60G</b>	2NC	2NC
<b>60H</b>	4NC	/
<b>60I</b>	3NC	1NO
<b>60L</b>	2NO+1NC	1NC
<b>60M</b>	2NO+1NC	1NO
<b>60N</b>	1NO+1NC	2NO
<b>60P</b>	1NC	3NC
<b>60R</b>	2NO+2NC	/
<b>60S</b>	1NC	2NO+1NC
<b>60T</b>	1NC	1NO+2NC
<b>60U</b>	/	4NC
<b>60V</b>	2NC	2NO
<b>60X</b>	1NO	3NC
<b>60Y</b>	1NO	1NO+2NC
<b>61A</b>	/	1NO+3NC
<b>61B</b>	/	2NO+2NC
<b>61C</b>	/	3NO+1NC
<b>61D</b>	1NC	3NO
<b>61E</b>	1NO	2NO+1NC
<b>61G</b>	2NO	1NO+1NC
<b>61H</b>	2NO	2NC
<b>61M</b>	3NO	1NC
<b>61R</b>	1NO+3NC	/
<b>61S</b>	3NO+1NC	/

**Note:** contact blocks 60U, 61A, 61B, 61C cannot be combined with operating principles D6D, D7D, D7E.

Operating principle	
<b>D1D</b>	locked actuator with de-energised solenoid. With sealable auxiliary release.
<b>D1E</b>	locked actuator with energised solenoid
<b>D5D</b>	locked actuator with de-energised solenoid. With auxiliary key release.
<b>D6D</b>	locked actuator with de-energised solenoid. With auxiliary key release and escape release button.
<b>D7D</b>	locked actuator with de-energised solenoid. With sealable auxiliary release and escape release button.
<b>D7E</b>	locked actuator with energised solenoid. With escape release button.

Auxiliary release options (only for articles FY ***D5D**, FY ***D6D**)	
	The key can be removed in locked and unlocked actuator position (standard)
<b>V34</b>	The key can be removed only in the locked position of the actuator
<b>V70</b>	Key release with triangular key with spring return (description at page 13)
<b>V73</b>	Key release with triangular key, no spring return (description at page 13)

Ambient temperature	
	-25°C ... +60°C (standard)
<b>T6</b>	-40°C ... +60°C

Pre-installed connectors	
	without connector (standard)
<b>K110</b>	M12 metal connector, 12-pole, bottom
<b>K800</b>	M23 metal connector, 12-pole, bottom
<b>K820</b>	M23 metal connector, 19-pole, bottom, configuration 1
...	...

For the complete list of possible combinations please contact our technical department.  
**Note:** The 19-pole M23 connector is available only for the versions with built-in control devices and a power supply voltage of 24 Vdc.

Contact type	
	silver contacts (standard)
<b>G</b>	silver contacts with 1 µm gold coating

Actuators	
	without actuator (standard)
<b>F20</b>	straight actuator VF KEYF20
<b>F21</b>	angled actuator VF KEYF21
<b>F22</b>	actuator with rubber pads VF KEYF22
<b>F28</b>	universal actuator VF KEYF28

Button configurations	
<b>N01</b>	configuration 01
<b>N02</b>	configuration 02
<b>N03</b>	configuration 03
...	other configurations on request

Release button length	
	for max. 15 mm wall thickness (standard)
<b>LP30</b>	for max. 30 mm wall thickness
<b>LP40</b>	for max. 40 mm wall thickness
<b>LP60</b>	for max. 60 mm wall thickness
<b>LPRG</b>	adjustable, for wall thickness from 60 mm to 500 mm

Signalling LEDs	
<b>A</b>	two green LEDs switched-on by the solenoid power supply
<b>B</b>	red and green LEDs, freely configurable
<b>C</b>	orange and green LEDs, freely configurable
<b>Z</b>	without LED

Solenoid supply voltage	
<b>0</b>	24 Vac/dc (-10% ... +10%)
<b>1</b>	120 Vac/dc (-15% ... +10%)
<b>2</b>	230 Vac (-15% ... +10%)
<b>3</b>	12 Vdc (-15% ... +20%)



### Main features

- Actuator holding force  $F_{1max}$ : 2800 N
- 30 contact blocks with 4 contacts
- Technopolymer housing, three M20 conduit entries
- Protection degrees IP67 and IP69K
- Versions with key release and escape release button
- Versions with integrated control devices
- 4 stainless steel actuators
- Head and release devices, individually turnable and non-detachable
- Signalling LEDs
- Operation with energised or de-energised solenoid

### Quality marks:



IMQ approval: Pending  
 UL approval: Pending  
 CCC approval: Pending

### Technical data

#### Housing

Housing made of glass fibre reinforced technopolymer, self-extinguishing and shock-proof  
 Metal head and release device, powder-coated and fired in a kiln

Three knock-out threaded conduit entries: M20x1.5 (standard)  
 Protection degree: IP67 acc. to EN 60529 (with cable gland of equal or higher protection degree)  
 IP69K acc. to ISO 20653 (Protect the cables from direct high-pressure and high-temperature jets)

Protection degree with control devices: IP65 acc. to EN 60529

#### General data

SIL (SIL CL) up to: SIL 3 acc. to EN 62061  
 Performance Level (PL) up to: PL e acc. to EN ISO 13849-1  
 Interlock with mechanical lock, coded: type 2 acc. to EN ISO 14119  
 Coding level: low acc. to EN ISO 14119  
 Safety parameters:  
 $B_{100}$ : 5,000,000 for NC contacts  
 Mission time: 20 years  
 Ambient temperature: -25°C ... +60°C (standard)  
 -40°C ... +60°C (T6 option)

Max. actuation frequency: 600 operating cycles/hour  
 Mechanical endurance: 1 million operating cycles  
 Max. actuation speed: 0.5 m/s  
 Min. actuation speed: 1 mm/s  
 Maximum force before breakage  $F_{1max}$ : 2800 N acc. to EN ISO 14119  
 Max. holding force  $F_{zh}$ : 2150 N acc. to EN ISO 14119  
 Maximum clearance of locked actuator: 4.5 mm  
 Released actuator extraction force: 30 N  
 Tightening torques for installation: See page 379 - Safety Catalogue  
 Wire cross-sections and wire stripping lengths: See page 399 - Safety Catalogue

#### Solenoid

Duty cycle: 100% ED (continuous operation)  
 Solenoid protection 12 V: type gG fuse 1 A  
 Solenoid protection 24 V: type gG fuse 0.5 A  
 Solenoid protection 120 V: fuse 315 mA, delayed  
 Solenoid protection 230 V: fuse 315 mA, delayed  
 Solenoid consumption: 9 VA

#### In compliance with standards:

EN 60947-5-1, EN 60947-1, EN 60204-1, EN ISO 14119, EN ISO 12100, EN 60529, EN 61000-6-2, EN 61000-6-3, EN IEC 63000, BG-GS-ET-15, UL 508, CSA 22.2 N. 14.

#### Approvals:

EN 60947-5-1, UL 508, CSA 22.2 N. 14, GB/T14048.5

#### Compliance with the requirements of:

Machinery Directive 2006/42/EC, EMC Directive 2014/30/EU, RoHS Directive 2011/65/EU.

#### Positive contact opening in conformity with standards:

IEC 60947-5-1, EN 60947-5-1.

**⚠ If not expressly indicated in this chapter, for correct installation and utilization of all articles see chapter Utilization requirements from page 377 to page 392 of the General Catalogue Safety 2021-2022.**

	Electrical data of the contact block of the switch	Utilization category
without connector	Thermal current ( $I_{th}$ ): 10 A Rated insulation voltage ( $U_i$ ): 400 Vac 300 Vdc Rated impulse withstand voltage ( $U_{imp}$ ): 6 kV Conditional short circuit current: 1000 A acc. to EN 60947-5-1 Protection against short circuits: type gG fuse 10 A 500 V Pollution degree: 3	Alternating current: AC15 (50÷60 Hz) $U_e$ (V) 120 250 400 $I_e$ (A) 6 5 3 Direct current: DC13 $U_e$ (V) 24 125 250 $I_e$ (A) 3 0.7 0.4
with M23 connector, 12-pole	Thermal current ( $I_{th}$ ): 8 A Rated insulation voltage ( $U_i$ ): 250 Vac 300 Vdc Protection against short circuits: type gG fuse 8 A 500 V Pollution degree: 3	Alternating current: AC15 (50÷60 Hz) $U_e$ (V) 120 250 $I_e$ (A) 6 5 Direct current: DC13 $U_e$ (V) 24 125 250 $I_e$ (A) 3 0.7 0.4
with M23 connector, 19-pole	Thermal current ( $I_{th}$ ): 3 A Rated insulation voltage ( $U_i$ ): 30 Vac 36 Vdc Protection against short circuits: type gG fuse 1 A Pollution degree: 3	Alternating current: AC15 (50÷60 Hz) $U_e$ (V) 24 $I_e$ (A) 3 Direct current: DC13 $U_e$ (V) 24 $I_e$ (A) 3
with M12 connector, 12-pole	Thermal current ( $I_{th}$ ): 1.5 A Rated insulation voltage ( $U_i$ ): 30 Vac 36 Vdc Protection against short circuits: type gG fuse 1.5 A Pollution degree: 3	Alternating current: AC15 (50÷60 Hz) $U_e$ (V) 24 $I_e$ (A) 1.5 Direct current: DC13 $U_e$ (V) 24 $I_e$ (A) 1.5



## Operating principle

The operating principle of these safety switches allows three different operating states:

**state A**: with inserted and locked actuator

**state B**: with inserted but not locked actuator

**state C**: with extracted actuator


All or some of these states can be monitored by means of electrical NO contacts or NC contacts with positive opening by selecting the appropriate contact blocks. In detail, contact blocks that have electric contacts marked with the symbol of the solenoid () are switched in the transition between the state A and state B, while the electric contacts marked with the symbol of the actuator () are switched between state B and state C.

### Operating principle

Select from two operating principles for actuator locking:

- **Operating principle D**: locked actuator with de-energised solenoid. The actuator is released by applying the power supply to the solenoid (see example of the operating phases).
- **Operating principle E**: locked actuator with energised solenoid. The actuator is released by switching off the power supply to the solenoid. This version should only be used under certain conditions, since a power failure at the system will result in the immediate opening of the guard.




### Example: operating phases with FY 60AD1D0A-F21 (switch with operating principle D)

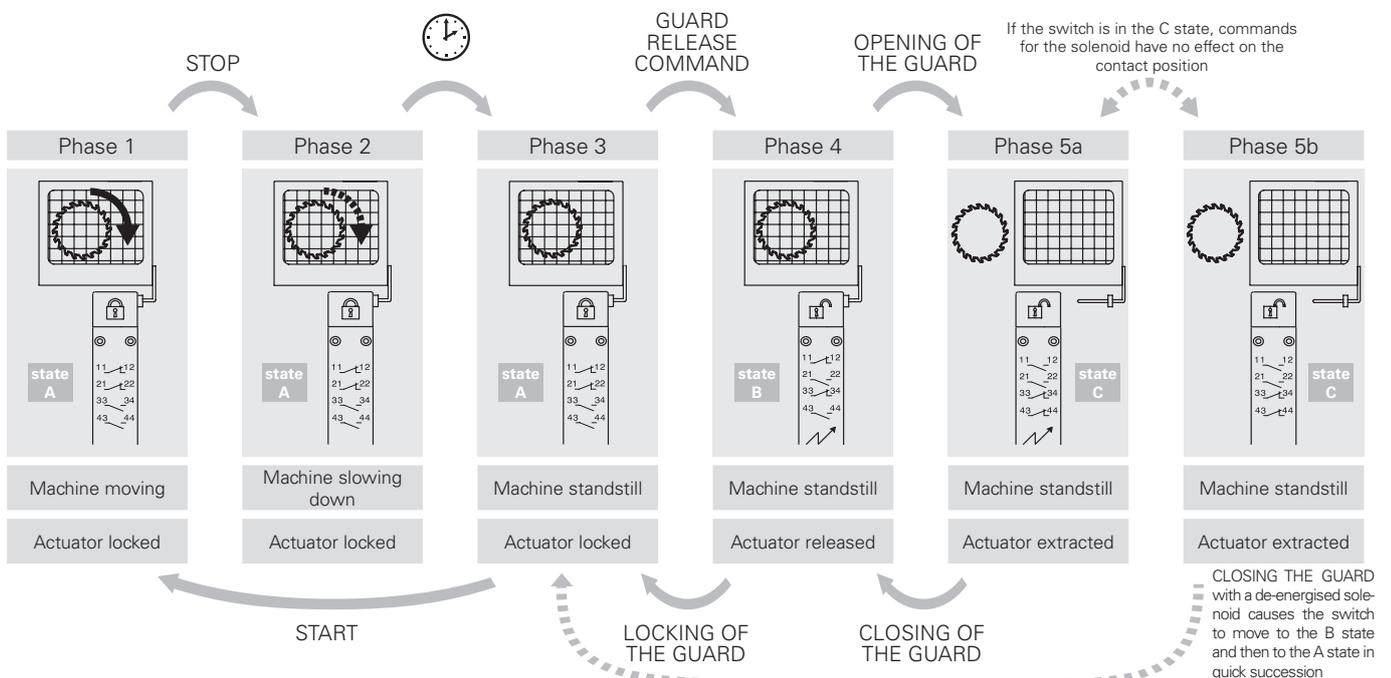

# FY series safety switches with separate actuator with lock

## Selection table for switches

Contact type  
 = slow action

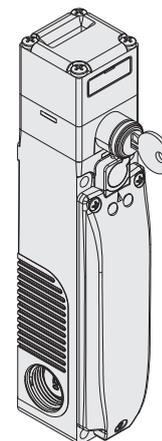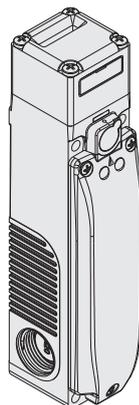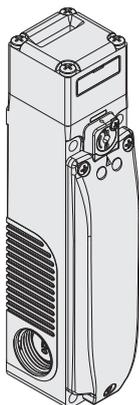

Operating principle	Operating principle D, with sealable auxiliary release device, without actuator	Operating principle E, without actuator	Operating principle D, with key release, without actuator
Unità di contatto	 	 	 
60A	 FY 60AD1D0A   1NO+1NC 1NO+1NC	FY 60AD1E0A   1NO+1NC 1NO+1NC	FY 60AD5D0A   1NO+1NC 1NO+1NC
60B	 FY 60BD1D0A   2NC 1NO+1NC	FY 60BD1E0A   2NC 1NO+1NC	FY 60BD5D0A   2NC 1NO+1NC
60C	 FY 60CD1D0A   3NC 1NC	FY 60CD1E0A   3NC 1NC	FY 60CD5D0A   3NC 1NC
60D	 FY 60DD1D0A   1NO+1NC 2NC	FY 60DD1E0A   1NO+1NC 2NC	FY 60DD5D0A   1NO+1NC 2NC
60E	 FY 60ED1D0A   1NO+2NC 1NC	FY 60ED1E0A   1NO+2NC 1NC	FY 60ED5D0A   1NO+2NC 1NC
60F	 FY 60FD1D0A   1NO+2NC 1NO	FY 60FD1E0A   1NO+2NC 1NO	FY 60FD5D0A   1NO+2NC 1NO
60G	 FY 60GD1D0A   2NC 2NC	FY 60GD1E0A   2NC 2NC	FY 60GD5D0A   2NC 2NC
60H	 FY 60HD1D0A   4NC /	FY 60HD1E0A   4NC /	FY 60HD5D0A   4NC /
60I	 FY 60ID1D0A   3NC 1NO	FY 60ID1E0A   3NC 1NO	FY 60ID5D0A   3NC 1NO
60L	 FY 60LD1D0A   2NO+1NC 1NC	FY 60LD1E0A   2NO+1NC 1NC	FY 60LD5D0A   2NO+1NC 1NC
60M	 FY 60MD1D0A   2NO+1NC 1NO	FY 60MD1E0A   2NO+1NC 1NO	FY 60MD5D0A   2NO+1NC 1NO
60N	 FY 60ND1D0A   1NO+1NC 2NO	FY 60ND1E0A   1NO+1NC 2NO	FY 60ND5D0A   1NO+1NC 2NO
60P	 FY 60PD1D0A   1NC 3NC	FY 60PD1E0A   1NC 3NC	FY 60PD5D0A   1NC 3NC
60R	 FY 60RD1D0A   2NO+2NC /	FY 60RD1E0A   2NO+2NC /	FY 60RD5D0A   2NO+2NC /
60S	 FY 60SD1D0A   1NC 2NO+1NC	FY 60SD1E0A   1NC 2NO+1NC	FY 60SD5D0A   1NC 2NO+1NC
60T	 FY 60TD1D0A   1NC 1NO+2NC	FY 60TD1E0A   1NC 1NO+2NC	FY 60TD5D0A   1NC 1NO+2NC
60U	 FY 60UD1D0A  / 4NC	FY 60UD1E0A  / 4NC	FY 60UD5D0A  / 4NC
60V	 FY 60VD1D0A   2NC 2NO	FY 60VD1E0A   2NC 2NO	FY 60VD5D0A   2NC 2NO
60X	 FY 60XD1D0A  1NO 3NC	FY 60XD1E0A  1NO 3NC	FY 60XD5D0A  1NO 3NC
60Y	 FY 60YD1D0A  1NO 1NO+2NC	FY 60YD1E0A  1NO 1NO+2NC	FY 60YD5D0A  1NO 1NO+2NC
61A	 FY 61AD1D0A  / 1NO+3NC	FY 61AD1E0A  / 1NO+3NC	FY 61AD5D0A  / 1NO+3NC
61B	 FY 61BD1D0A  / 2NO+2NC	FY 61BD1E0A  / 2NO+2NC	FY 61BD5D0A  / 2NO+2NC
61C	 FY 61CD1D0A  / 3NO+1NC	FY 61CD1E0A  / 3NO+1NC	FY 61CD5D0A  / 3NO+1NC
61D	 FY 61DD1D0A   1NC 3NO	FY 61DD1E0A   1NC 3NO	FY 61DD5D0A   1NC 3NO
61E	 FY 61ED1D0A  1NO 2NO+1NC	FY 61ED1E0A  1NO 2NO+1NC	FY 61ED5D0A  1NO 2NO+1NC
61G	 FY 61GD1D0A  2NO 1NO+1NC	FY 61GD1E0A  2NO 1NO+1NC	FY 61GD5D0A  2NO 1NO+1NC
61H	 FY 61HD1D0A  2NO 2NC	FY 61HD1E0A  2NO 2NC	FY 61HD5D0A  2NO 2NC
61M	 FY 61MD1D0A  3NO 1NC	FY 61MD1E0A  3NO 1NC	FY 61MD5D0A  3NO 1NC
61R	 FY 61RD1D0A   1NO+3NC /	FY 61RD1E0A   1NO+3NC /	FY 61RD5D0A   1NO+3NC /
61S	 FY 61SD1D0A   3NO+1NC /	FY 61SD1E0A   3NO+1NC /	FY 61SD5D0A   3NO+1NC /
Actuating force	30 N (60 N  )		
Travel diagrams	Page 131 - General Catalogue Safety 2021-2022		




**Legend:**  With positive opening according to EN 60947-5-1,  interlock with lock monitoring acc. to EN ISO 14119

**Note:** Refer to pages 127-128 of the General Catalogue Safety 2021-2022 for the position of the contacts in the states of the switch.

**Note:** See pages 17-18 for the connection diagrams for M12 and M23 connector contact blocks.



## Selection table for switches

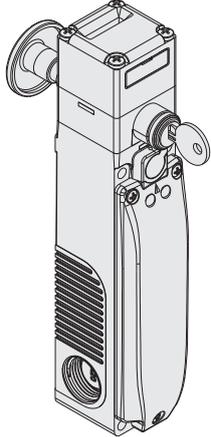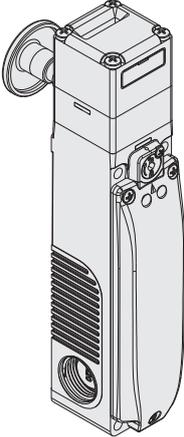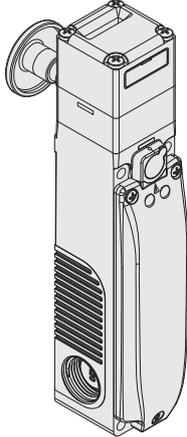
			
Contact type L = slow action			
Operating principle	Operating principle D, with key release, escape release button, without actuator	Operating principle D, with escape release button, without actuator	Operating principle E, with escape release button, without actuator
Unità di contatto	 	 	 
60A L FY 60AD6D0A   1NO+1NC 1NO+1NC	FY 60AD7D0A   1NO+1NC 1NO+1NC	FY 60AD7E0A   1NO+1NC 1NO+1NC	
60B L FY 60BD6D0A   2NC 1NO+1NC	FY 60BD7D0A   2NC 1NO+1NC	FY 60BD7E0A   2NC 1NO+1NC	
60C L FY 60CD6D0A   3NC 1NC	FY 60CD7D0A   3NC 1NC	FY 60CD7E0A   3NC 1NC	
60D L FY 60DD6D0A   1NO+1NC 2NC	FY 60DD7D0A   1NO+1NC 2NC	FY 60DD7E0A   1NO+1NC 2NC	
60E L FY 60ED6D0A   1NO+2NC 1NC	FY 60ED7D0A   1NO+2NC 1NC	FY 60ED7E0A   1NO+2NC 1NC	
60F L FY 60FD6D0A   1NO+2NC 1NO	FY 60FD7D0A   1NO+2NC 1NO	FY 60FD7E0A   1NO+2NC 1NO	
60G L FY 60GD6D0A   2NC 2NC	FY 60GD7D0A   2NC 2NC	FY 60GD7E0A   2NC 2NC	
60H L FY 60HD6D0A   4NC /	FY 60HD7D0A   4NC /	FY 60HD7E0A   4NC /	
60I L FY 60ID6D0A   3NC 1NO	FY 60ID7D0A   3NC 1NO	FY 60ID7E0A   3NC 1NO	
60L L FY 60LD6D0A   2NO+1NC 1NC	FY 60LD7D0A   2NO+1NC 1NC	FY 60LD7E0A   2NO+1NC 1NC	
60M L FY 60MD6D0A   2NO+1NC 1NO	FY 60MD7D0A   2NO+1NC 1NO	FY 60MD7E0A   2NO+1NC 1NO	
60N L FY 60ND6D0A   1NO+1NC 2NO	FY 60ND7D0A   1NO+1NC 2NO	FY 60ND7E0A   1NO+1NC 2NO	
60P L FY 60PD6D0A   1NC 3NC	FY 60PD7D0A   1NC 3NC	FY 60PD7E0A   1NC 3NC	
60R L FY 60RD6D0A   2NO+2NC /	FY 60RD7D0A   2NO+2NC /	FY 60RD7E0A   2NO+2NC /	
60S L FY 60SD6D0A   1NC 2NO+1NC	FY 60SD7D0A   1NC 2NO+1NC	FY 60SD7E0A   1NC 2NO+1NC	
60T L FY 60TD6D0A   1NC 1NO+2NC	FY 60TD7D0A   1NC 1NO+2NC	FY 60TD7E0A   1NC 1NO+2NC	
60V L FY 60VD6D0A   2NC 2NO	FY 60VD7D0A   2NC 2NO	FY 60VD7E0A   2NC 2NO	
60X L FY 60XD6D0A  1NO 3NC	FY 60XD7D0A  1NO 3NC	FY 60XD7E0A  1NO 3NC	
60Y L FY 60YD6D0A  1NO 1NO+2NC	FY 60YD7D0A  1NO 1NO+2NC	FY 60YD7E0A  1NO 1NO+2NC	
61D L FY 61DD6D0A   1NC 3NO	FY 61DD7D0A   1NC 3NO	FY 61DD7E0A   1NC 3NO	
61E L FY 61ED6D0A  1NO 2NO+1NC	FY 61ED7D0A  1NO 2NO+1NC	FY 61ED7E0A  1NO 2NO+1NC	
61G L FY 61GD6D0A  2NO 1NO+1NC	FY 61GD7D0A  2NO 1NO+1NC	FY 61GD7E0A  2NO 1NO+1NC	
61H L FY 61HD6D0A  2NO 2NC	FY 61HD7D0A  2NO 2NC	FY 61HD7E0A  2NO 2NC	
61M L FY 61MD6D0A  3NO 1NC	FY 61MD7D0A  3NO 1NC	FY 61MD7E0A  3NO 1NC	
61R L FY 61RD6D0A   1NO+3NC /	FY 61RD7D0A   1NO+3NC /	FY 61RD7E0A   1NO+3NC /	
61S L FY 61SD6D0A   3NO+1NC /	FY 61SD7D0A   3NO+1NC /	FY 61SD7E0A   3NO+1NC /	
Actuating force	30 N (60 N  )		
Travel diagrams	Page 131 - General Catalogue Safety 2021-2022		

**Legend:**  With positive opening according to EN 60947-5-1,  interlock with lock monitoring acc. to EN ISO 14119


**Note:** Refer to pages 127-128 of the General Catalogue Safety 2021-2022 for the position of the contacts in the states of the switch.

**Note:** See pages 17-18 for the connection diagrams for M12 and M23 connector contact blocks.


## Switch with integrated field-wireable control devices




FY 6.....-N07			
	Description	Colour	Diagram
Device 1	Closing cap	black	/
Device 2	Illuminated button, spring-return 1NO	white	




FY 6.....-N10			
	Description	Colour	Diagram
Device 1	Closing cap	black	/
Device 2	Selector switch 1NO with two fixed positions	black	




FY 6.....-N08			
	Description	Colour	Diagram
Device 1	Closing cap	black	/
Device 2	Illuminated button, spring-return 1NO	blue	




FY 6.....-N11			
	Description	Colour	Diagram
Device 1	Three-position key selector switch 2NO with return to centre	black	
Device 2	Closing cap	black	/




FY 6.....-N09			
	Description	Colour	Diagram
Device 1	Closing cap	black	/
Device 2	Spring-return button 1NO	black	




FY 6.....-N12			
	Description	Colour	Diagram
Device 1	Closing cap	black	/
Device 2	Emergency stop button with rotary release 2NC	red	




FY 6.....-N04			
	Description	Colour	Diagram
Device 1	Illuminated button, spring-return 1NO	white	
Device 2	Illuminated button, spring-return 1NO	blue	




FY 6.....-N01			
	Description	Colour	Diagram
Device 1	Illuminated button, spring-return 1NO	white	
Device 2	Emergency stop button with rotary release 2NC	red	




FY 6.....-N05			
	Description	Colour	Diagram
Device 1	Illuminated button, spring-return 1NO	white	
Device 2	Spring-return button 1NO	black	



FY 6.....-N02			
	Description	Colour	Diagram
Device 1	Spring-return button 1NO	black	
Device 2	Emergency stop button with rotary release 2NC	red	



FY 6.....-N06			
	Description	Colour	Diagram
Device 1	Illuminated button, spring-return 1NO	yellow	
Device 2	Illuminated button, spring-return 1NO	blue	






FY 6.....-N03			
	Description	Colour	Diagram
Device 1	Indicator light	yellow	
Device 2	Emergency stop button with rotary release 2NC	red	



## Internal connections (version with integrated control devices to be connected)


Internal terminal strip  
switch contact blocks

Internal terminal strip  
integrated control devices

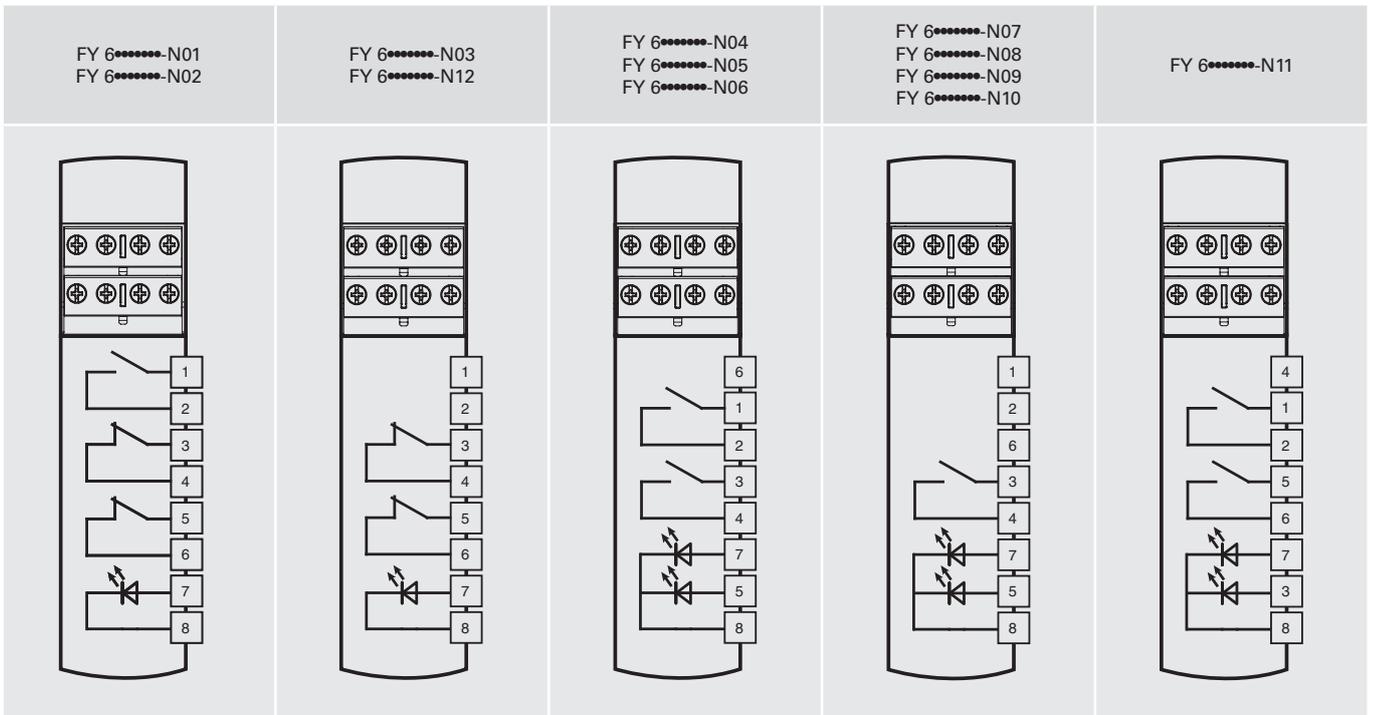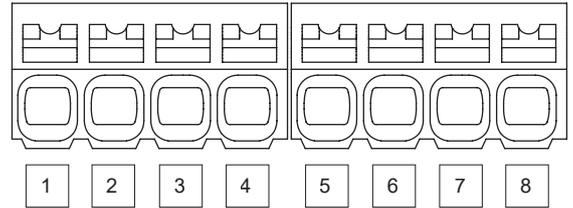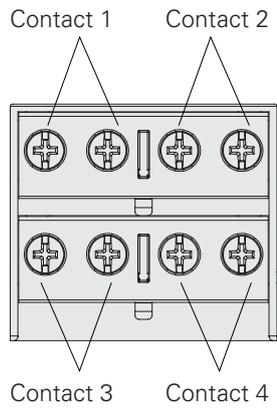


**Note:** Refer to pages 127-128 of the General Catalogue Safety 2021-2022 for the position of the contacts in the states of the switch.


## Switch with integrated control devices and M23 connector, 19-pole




FY 6.....-N07K823			
	Description	Colour	Diagram
Device 1	Closing cap	black	/
Device 2	Illuminated button, spring-return 1NO	white	




FY 6.....-N10K823			
	Description	Colour	Diagram
Device 1	Closing cap	black	/
Device 2	Selector switch 1NO with two fixed positions	black	




FY 6.....-N08K823			
	Description	Colour	Diagram
Device 1	Closing cap	black	/
Device 2	Illuminated button, spring-return 1NO	blue	




FY 6.....-N11K824			
	Description	Colour	Diagram
Device 1	Three-position key selector switch 2NO with return to centre	black	
Device 2	Closing cap	black	/




FY 6.....-N09K823			
	Description	Colour	Diagram
Device 1	Closing cap	black	/
Device 2	Spring-return button 1NO	black	




FY 6.....-N12K821			
	Description	Colour	Diagram
Device 1	Closing cap	black	/
Device 2	Emergency stop button with rotary release 2NC	red	




FY 6.....-N04K822			
	Description	Colour	Diagram
Device 1	Illuminated button, spring-return 1NO	white	
Device 2	Illuminated button, spring-return 1NO	blue	




FY 6.....-N01K820			
	Description	Colour	Diagram
Device 1	Illuminated button, spring-return 1NO	white	
Device 2	Emergency stop button with rotary release 2NC	red	




FY 6.....-N05K822			
	Description	Colour	Diagram
Device 1	Illuminated button, spring-return 1NO	white	
Device 2	Spring-return button 1NO	black	



FY 6.....-N02K820			
	Description	Colour	Diagram
Device 1	Spring-return button 1NO	black	
Device 2	Emergency stop button with rotary release 2NC	red	



FY 6.....-N06K822			
	Description	Colour	Diagram
Device 1	Illuminated button, spring-return 1NO	yellow	
Device 2	Illuminated button, spring-return 1NO	blue	




FY 6.....-N03K821			
	Description	Colour	Diagram
Device 1	Indicator light	yellow	
Device 2	Emergency stop button with rotary release 2NC	red	



## Internal connections (version with integrated control devices)

### M23 connector, 19-pole



To connect the switch contact block to the 19-pole M23 connector, see pin numbers 1 to 10 of the diagrams on page 17.

FY 6*****-N01K820 FY 6*****-N02K820	FY 6*****-N03K821 FY 6*****-N12K821	FY 6*****-N04K822 FY 6*****-N05K822 FY 6*****-N06K822	FY 6*****-N07K823 FY 6*****-N08K823 FY 6*****-N09K823 FY 6*****-N10K823	FY 6*****-N11K824

# FY series safety switches with separate actuator with lock

## Stainless steel actuators

**IMPORTANT:** These actuators can be used only with items of the FG and FY series (e.g. FY 60AD1D0A-F20).  
Low level of coding acc. to EN ISO 14119.

	Article	Description
	VF KEYF20	Straight actuator


	Article	Description
	VF KEYF21	Angled actuator

	Article	Description
	VF KEYF22	Actuator with rubber pads

## Universal actuator VF KEYF28

**IMPORTANT:** These actuators can be used only with items of the FG and FY series (e.g. FY 60AD1D0A-F28).  
Low level of coding acc. to EN ISO 14119.

	Article	Description
	VF KEYF28	Universal actuator

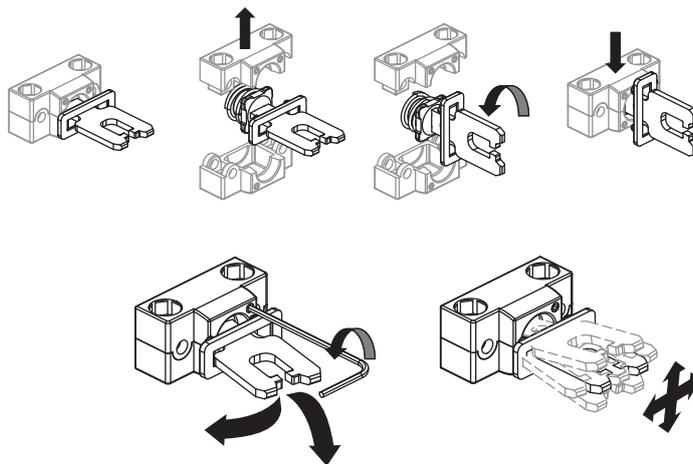


Jointed actuator for guards with poor alignment, adjustable in two dimensions for small doors; can be mounted in various positions. The metal fixing body has two pairs of bore holes; it is provided for rotating the working plane of the actuator by 90°.

## Auxiliary key release with triangular key



Articles with the V70 and V73 option have an auxiliary key release with a triangular key that meets DIN 22417 standards. This type of lock can be used in situations where the switch must only be unlocked using the corresponding triangular key, a tool which is not usually available. There are two versions of the triangular key release: with a spring return (option V70) and without a spring return (option V73).





# FY series safety switches with separate actuator with lock

## Available integrated devices

	Description	Colour	Article	Combinable with contacts (1)	Protrusion (x) mm
	Illuminated button, spring-return	<ul style="list-style-type: none"> <li>● White</li> <li>● Red</li> <li>● Green</li> <li>● Yellow</li> <li>● Blue</li> </ul>	<ul style="list-style-type: none"> <li>VN NG-AC27121</li> <li>VN NG-AC27123</li> <li>VN NG-AC27124</li> <li>VN NG-AC27125</li> <li>VN NG-AC27126</li> </ul>	<ul style="list-style-type: none"> <li>1NO</li> <li>(1NC)</li> <li>(2NO)</li> <li>(1NO+1NC)</li> </ul>	3
	Non-illuminated button, spring-return	● Black	VN NG-AC27122	<ul style="list-style-type: none"> <li>1NO</li> <li>(1NC)</li> <li>(2NO)</li> <li>(1NO+1NC)</li> </ul>	3
	Non-laser-markable, illuminated, projecting push button <sup>(2)</sup>	● Red	VN NG-AC26018	<ul style="list-style-type: none"> <li>1NO</li> <li>(1NC)</li> <li>(2NO)</li> <li>(1NO+1NC)</li> </ul>	6,1
	Indicator light	<ul style="list-style-type: none"> <li>● Red</li> <li>● Yellow</li> <li>● Green</li> <li>● Blue</li> <li>● White</li> </ul>	<ul style="list-style-type: none"> <li>VN NG-AC26060</li> <li>VN NG-AC26061</li> <li>VN NG-AC26062</li> <li>VN NG-AC26063</li> <li>VN NG-AC26064</li> </ul>	/	2,7
	Emergency stop button acc. to EN ISO 13850				
	Rotary release Push-pull release	<ul style="list-style-type: none"> <li>● Red</li> <li>● Red</li> </ul>	<ul style="list-style-type: none"> <li>VN NG-AC26052</li> <li>VN NG-AC26055</li> </ul>	2NC	26,4
	Emergency stop button for contact blocks with 3 contacts acc. to EN ISO 13850				
	Rotary release	● Red	VN NG-AC26056	2NC+1NO	26,4
	Illuminated emergency stop button acc. to EN ISO 13850				
	Rotary release Push-pull release	<ul style="list-style-type: none"> <li>● Red</li> <li>● Red</li> </ul>	<ul style="list-style-type: none"> <li>VN NG-AC26051</li> <li>VN NG-AC26054</li> </ul>	2NC	26,4
	Simple stop button				
	Rotary release Push-pull release	<ul style="list-style-type: none"> <li>● Black</li> <li>● Black</li> </ul>	<ul style="list-style-type: none"> <li>VN NG-AC26053</li> <li>VN NG-AC26057</li> </ul>	2NC	26,4
	Illuminated selector switch with handle, with transparent lens for LED				
	<ul style="list-style-type: none"> <li>∨</li> <li>▷</li> <li>∨</li> <li>∨</li> </ul>	<ul style="list-style-type: none"> <li>● Black</li> <li>● Black</li> <li>● Black</li> <li>● Black</li> </ul>	<ul style="list-style-type: none"> <li>VN NG-AC26033</li> <li>VN NG-AC26030</li> <li>VN NG-AC26034</li> <li>VN NG-AC26031</li> </ul>	<ul style="list-style-type: none"> <li>1NO</li> <li>1NC</li> <li>(2NO)</li> <li>(1NO+1NC)</li> </ul>	16,8
	Key selector switch, 2 positions				
	<ul style="list-style-type: none"> <li>∨</li> <li>▷</li> <li>∨</li> </ul>	<ul style="list-style-type: none"> <li>● Black</li> <li>● Black</li> <li>● Black</li> </ul>	<ul style="list-style-type: none"> <li>VN NG-AC26043</li> <li>VN NG-AC26040</li> <li>VN NG-AC26041</li> </ul>	<ul style="list-style-type: none"> <li>1NO</li> <li>(1NC)</li> <li>(2NO)</li> <li>(1NO+1NC)</li> </ul>	<ul style="list-style-type: none"> <li>39 (a)</li> <li>14 (b)</li> </ul>
	Closing cap	● Black	VN NG-AC26020	/	2,7
	Fixing key	● Black	VN NG-AC26080	/	/

**Legend:**  Maintained  Spring-return  Key extraction position (a) with key (b) without key

<sup>(1)</sup> The contacts in brackets are on request. Contact our technical department to verify the effective feasibility of the control panel with the chosen combination of control devices.

<sup>(2)</sup> The projecting buttons are not laser markable.

### To order buttons with marking:

add the marking code indicated in the tables on pp. 159-162 to the article codes of the General Catalogue HMI 2021-2022.

Example: Black spring-return button with "O" engraving.

VN NG-AC27122 → VN NG-AC27122-L1



## Technical data of the integrated control devices

### General data

Protection degree:	IP65 acc. to EN 60529	
Mechanical endurance:		
Spring-return button:	1 million operating cycles	
Emergency stop button:	50,000 operating cycles	
Selector switch:	300,000 operating cycles	
Key selector switch:	50,000 operating cycles	
	30,000 operating cycles including removal of the key	
Safety parameter $B_{10D}$ :	100,000 (emergency stop button)	

### Actuating force

Spring-return button:	4 N min	100 N max.
Emergency stop button:	20 N min	100 N max.
Selector switch:	0.1 Nm min	1.5 Nm max.
Key selector switch:	0.1 Nm min	1.3 Nm max.

### Contact blocks of the control devices

Material of the contacts:	silver contacts	
Contact type:	Self-cleaning contacts with double interruption	

### Electrical data:

Thermal current $I_{th}$ :	1 A
Rated insulation voltage $U_i$ :	32 Vac/dc
Rated impulse withstand voltage $U_{imp}$ :	15 kV
LED supply voltage:	24 Vdc $\pm$ 15%
LED supply current:	10 mA per LED

### Utilization category of the contact block:

Direct current: DC13
$U_e$ (V) 24
$I_e$ (A) 0.55

### In compliance with standards:


IEC 60947-5-1, IEC 60947-5-5, EN ISO 13850

### ⚠ Installation for safety applications:

Always connect the safety circuit to the **NC contacts** (normally closed contacts) as stated in standard EN 60947-5-1.

## Accessories

Article	Description
VF KB2	Lock out device



Padlockable lock out device to prevent the actuator entry and the accidental closing of the door behind operators while they are in the danger area.  
To be used only with FG and FY series switches (e.g. FY 60AD1D0A). Hole diameter for padlocks: 9 mm.



Article	Description
VF KLA371	Set of two locking keys



Extra copy of the locking keys to be purchased if further keys are needed (standard supply: 2 units). The keys of all switches have the same code. Other codes on request.

## Release button



Article	Description
VF FG-LP15	Technopolymer release button for max. 15 mm wall thickness, supplied with screw
VF FG-LP30	Technopolymer release button for max. 30 mm wall thickness, supplied with screw
VF FG-LP40	Technopolymer release button for max. 40 mm wall thickness, supplied with screw
VF FG-LP60	Metal release button for max. 60 mm wall thickness, supplied with screw




Article	Description
VF FG-LPRG	Metal release button for wall thickness from 60 to 500 mm, supplied with 2 supports and 2 screws, without M10 threaded bar

The M10 bar can be supplied in zinc-plated steel with 1 m length. Article: AC 8512.


# FY series safety switches with separate actuator with lock

## Wiring diagram for M23 connectors

M23 connector, 12-pole



M23 connector, 19-pole



Refer to the diagrams on page 12 (connector pins 11-19) for the connections of the internal terminal strip of the control devices.

Contact block 60A 2NO+2NC		Contact block 60B 1NO+3NC		Contact block 60C 4NC		Contact block 60D 1NO+3NC		Contact block 60E 1NO+3NC		Contact block 60F 2NO+2NC		Contact block 60G 4NC		Contact block 60H 4NC		Contact block 60I 1NO+3NC		Contact block 60L 2NO+2NC	
Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.
A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2
NC	3-4	NC	3-4	NC	3-4	NO	3-4	NC	3-4	NC	3-4	NC	3-4	NC	3-4	NC	3-4	NC	3-4
NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6
NO	7-8	NC	7-8	NC	7-8	NC	7-8	NC	7-8	NO	7-8	NC	7-8	NC	7-8	NC	7-8	NO	7-8
NO	9-10	NO	9-10	NC	9-10	NC	9-10	NO	9-10	NO	9-10	NC	9-10	NC	9-10	NO	9-10	NO	9-10

Contact block 60M 3NO+1NC		Contact block 60N 3NO+1NC		Contact block 60P 4NC		Contact block 60R 2NO+2NC		Contact block 60S 2NO+2NC		Contact block 60T 1NO+3NC		Contact block 60U 4NC		Contact block 60V 2NO+2NC		Contact block 60X 1NO+3NC		Contact block 60Y 2NO+2NC	
Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.
A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2
NO	3-4	NO	3-4	NC	3-4	NC	3-4	NC	3-4	NC	3-4	NC	3-4	NC	3-4	NO	3-4	NC	3-4
NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6
NO	7-8	NO	7-8	NC	7-8	NO	7-8	NO	7-8	NC	7-8	NC	7-8	NO	7-8	NC	7-8	NO	7-8
NO	9-10	NO	9-10	NC	9-10	NO	9-10	NO	9-10	NO	9-10	NC	9-10	NO	9-10	NC	9-10	NO	9-10


Contact block 61A 1NO+3NC		Contact block 61B 2NO+2NC		Contact block 61C 3NO+1NC		Contact block 61D 3NO+1NC		Contact block 61E 3NO+1NC		Contact block 61G 3NO+1NC		Contact block 61H 2NO+2NC		Contact block 61M 3NO+1NC		Contact block 61R 1NO+3NC		Contact block 61S 3NO+1NC	
Contacts	Pin no.																		
A1-A2	1-2																		
NC	3-4	NC	3-4	NO	3-4	NO	3-4	NO	3-4	NO	3-4	NC	3-4	NO	3-4	NC	3-4	NO	3-4
NC	5-6																		
NC	7-8	NO	7-8	NC	7-8	NO	7-8												
NO	9-10																		

**Note:** the wires connected to pins 11 and 12 of the M23 12-pole connector can be used to activate the LEDs in FY series configurations with freely connectable LEDs.



## Wiring diagram for M12 connectors

### M12 connector, 12-pole



Contact block 60A 2NO+2NC		Contact block 60B 1NO+3NC		Contact block 60C 4NC		Contact block 60D 1NO+3NC		Contact block 60E 1NO+3NC		Contact block 60F 2NO+2NC		Contact block 60G 4NC		Contact block 60H 4NC		Contact block 60I 1NO+3NC		Contact block 60L 2NO+2NC									
Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.								
A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2						
NC	3-4	NC	3-4	NC	3-4	NO	3-4	NC	3-4	NC	3-4	NC	3-4	NC	3-4	NC	3-4	NC	3-4	NC	3-4	NC	3-4				
NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6		
NO	7-8	NC	7-8	NC	7-8	NC	7-8	NC	7-8	NO	7-8	NC	7-8	NC	7-8	NC	7-8	NC	7-8	NC	7-8	NO	7-8	NC	7-8		
NO	9-10	NO	9-10	NC	9-10	NC	9-10	NO	9-10	NO	9-10	NC	9-10	NC	9-10	NC	9-10	NO	9-10	NO	9-10	NO	9-10	NO	9-10	NO	9-10


Contact block 60M 3NO+1NC		Contact block 60N 3NO+1NC		Contact block 60P 4NC		Contact block 60R 2NO+2NC		Contact block 60S 2NO+2NC		Contact block 60T 1NO+3NC		Contact block 60U 4NC		Contact block 60V 2NO+2NC		Contact block 60X 1NO+3NC		Contact block 60Y 2NO+2NC											
Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.										
A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2	A1-A2	1-2								
NO	3-4	NO	3-4	NC	3-4	NC	3-4	NC	3-4	NC	3-4	NC	3-4	NC	3-4	NC	3-4	NO	3-4	NC	3-4	NC	3-4	NC	3-4				
NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6		
NO	7-8	NO	7-8	NC	7-8	NO	7-8	NO	7-8	NO	7-8	NC	7-8	NC	7-8	NO	7-8	NC	7-8	NO	7-8	NC	7-8	NO	7-8	NO	7-8		
NO	9-10	NO	9-10	NC	9-10	NO	9-10	NO	9-10	NO	9-10	NO	9-10	NC	9-10	NO	9-10	NC	9-10	NO	9-10	NC	9-10	NO	9-10	NO	9-10	NO	9-10

Contact block 61A 1NO+3NC		Contact block 61B 2NO+2NC		Contact block 61C 3NO+1NC		Contact block 61D 3NO+1NC		Contact block 61E 3NO+1NC		Contact block 61G 3NO+1NC		Contact block 61H 2NO+2NC		Contact block 61M 3NO+1NC		Contact block 61R 1NO+3NC		Contact block 61S 3NO+1NC											
Contacts	Pin no.																												
A1-A2	1-2	A1-A2	1-2																										
NC	3-4	NC	3-4	NO	3-4	NO	3-4	NO	3-4	NO	3-4	NC	3-4	NC	3-4	NO	3-4	NC	3-4	NO	3-4	NO	3-4	NO	3-4				
NC	5-6	NC	5-6	NC	5-6	NC	5-6	NC	5-6																				
NC	7-8	NO	7-8	NC	7-8	NO	7-8	NC	7-8	NO	7-8	NO	7-8																
NO	9-10	NO	9-10	NO	9-10	NO	9-10	NO	9-10	NO	9-10																		

**Note:** the wires connected to pins 11 and 12 of the M12 connector can be used to activate the LEDs in FY series configurations with freely connectable LEDs.



General Catalogue  
Detection



General Catalogue  
HMI



General Catalogue  
Safety



General Catalogue  
Lift



Website  
[www.pizzato.com](http://www.pizzato.com)



PASSION FOR QUALITY

**Pizzato Elettrica s.r.l.** via Torino, 1 - 36063 Marostica (VI) Italy

Phone: +39 0424 470 930

E-mail: [info@pizzato.com](mailto:info@pizzato.com)

Website: [www.pizzato.com](http://www.pizzato.com)

Any information or application example, connection diagrams included, described in this document are to be intended as purely descriptive. The choice and application of the products in conformity with the standards, in order to avoid damage to persons or goods, is the user's responsibility. The drawings and data contained in this document are not binding and we reserve the right, in order to improve the quality of our products, to modify them at any time without prior notice. All rights to the contents of this publication are reserved in accordance with current legislation on the protection of intellectual property. The reproduction, publication, distribution and modification, total or partial, of all or part of the original material contained therein (including, but not limited to, texts, images, graphics), whether on paper or in electronic form, are expressly prohibited without written permission from Pizzato Elettrica Srl. All rights reserved. © 2022 Copyright Pizzato Elettrica.

ZE FGL32A22-ENG



8 018851 577451